




- TORX® drive between tool and screw by line or surface contact rather than point contact.
- It also increases the amount of torque and force that can be transferred.

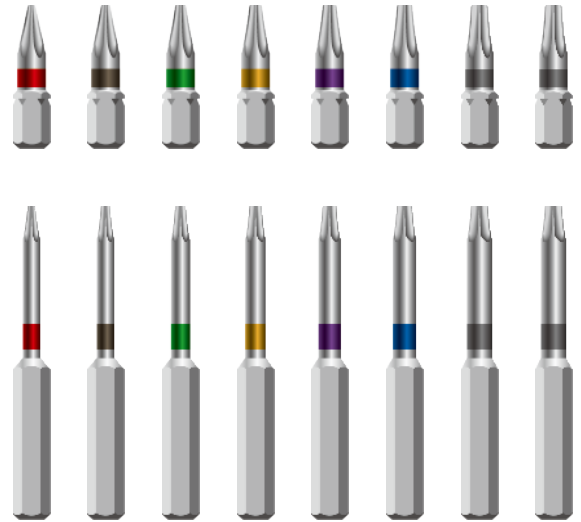


Spare

25mm Bits for TORX® screws

Hardness : HRC 58° ~60°

Material : High alloy steel

Standard : 1/4" DIN3126 – C6.3; DIN3126-E6.3




| Parts No. | Driver Size | L | | N.W. | Packaging Illustration |
|-------------------|-------------|----|-------|------|------------------------|
| 0-TPK-B01-TX06-25 | TX6 | 25 | 6 pcs | 31 g | |
| 0-TPK-B01-TX07-25 | TX7 | 25 | 6 pcs | 31 g | |
| 0-TPK-B01-TX08-25 | TX8 | 25 | 6 pcs | 31 g | |
| 0-TPK-B01-TX09-25 | TX9 | 25 | 6 pcs | 31 g | |
| 0-TPK-B01-TX10-25 | TX10 | 25 | 6 pcs | 31 g | |
| 0-TPK-B01-TX15-25 | TX15 | 25 | 6 pcs | 33 g | |
| 0-TPK-B01-TX20-25 | TX20 | 25 | 6 pcs | 33 g | |

50mm Bits for TORX® screws

Hardness : HRC 58° ~60°

Material : High alloy steel

Standard : 1/4" DIN3126 – C6.3; DIN3126-E6.3



| Parts No. | Driver Size | L | | N.W. | Packaging Illustration |
|-------------------|-------------|----|-------|------|------------------------|
| 0-TPK-B01-TX06-50 | TX6 | 50 | 6 pcs | 53 g | |
| 0-TPK-B01-TX07-50 | TX7 | 50 | 6 pcs | 53 g | |
| 0-TPK-B01-TX08-50 | TX8 | 50 | 6 pcs | 53 g | |
| 0-TPK-B01-TX09-50 | TX9 | 50 | 6 pcs | 55 g | |
| 0-TPK-B01-TX10-50 | TX10 | 50 | 6 pcs | 58 g | |
| 0-TPK-B01-TX15-50 | TX15 | 50 | 6 pcs | 59 g | |
| 0-TPK-B01-TX20-50 | TX20 | 50 | 6 pcs | 62 g | |
| 0-TPK-B01-TX25-50 | TX25 | 50 | 6 pcs | 62 g | |

TORX® and TORX PLUS® are registered trademarks of Acument global technologies LLC.